

ZIRCON®

StudSensor™ L40


STUD FINDER / DETECTOR DE VIGAS
EDGE FINDING / DETECCIÓN DE BORDES

Deep-Scanning Stud Finder with SpotLite® Pointer and WireWarning® Detection



The StudSensor™ L40 quickly and easily locates the edges of wood and metal studs and joists behind walls, floors, and ceilings. It features an easy-to-understand user interface and wide, contoured overmold for a comfortable, secure grip. WireWarning® detection indicates the presence of live AC voltage. Use to find the edges of wood and metal studs to securely anchor pictures, mirrors, and shelves.

- **StudScan mode** locates the edges of wood or metal studs up to ¾ in. (19 mm) deep
- **DeepScan mode** doubles the scanning depth to 1½ in. (38 mm) deep
- **READY light** indicates when calibration has completed successfully
- **Red arrows** light up sequentially as you approach a stud and top **EDGE arrow** illuminates when you have found a stud edge
- Zircon's patented "**over-the-stud**" indication alerts the user to start the scan in a new location if scanning begins over a stud
- **WireWarning detection** indicates the presence of live, unshielded AC electrical wiring up to 2 in. (51 mm) deep
- **SpotLite Pointer** shines an arrow-shaped light on the wall to clearly indicate the edge of the stud
- **Translucent base and illuminated "V" marker groove** for more accurate marking of stud edge location
- **Rubber handle** for non-slip grip

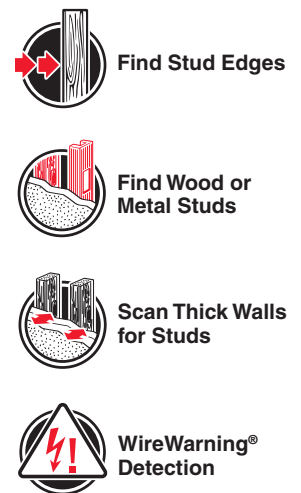

Dimensions 6.66 in. H x 2.80 in. W x 1.76 in. D
(169 mm x 71 mm x 45 mm)

Weight 4.0 oz. (112.2 g) without battery

Battery Type 9-V alkaline, required

Position Accuracy*

Up to a depth of ¾ in. (19 mm):

Typically within ¼ in. (3 mm) using the dual scan and mark procedure

Up to a depth of 1½ in. (38 mm):

Typically within ¾ in. (5 mm) using the dual scan and mark procedure

Depth* **StudScan mode:** Up to ¾ in. (19 mm)
DeepScan mode: Up to 1½ in. (38 mm)

WireWarning® Position Accuracy*

Typically 90-250 V at 50-60Hz within 6 in. (152 mm) of a hot, unshielded wire in drywall

WireWarning® Depth*

In typical wall with Romex® wiring, wire can be detected up to 2 in. (51 mm) deep

Operating Temperature

20° to 120°F (-7° to 49°C)

Storage Temperature

-20° to 150°F (-29° to 66°C)

Humidity

80% RH (non-condensing)

Water Resistance

Splash and water resistant, not waterproof

*NOTE: Sensing depth and accuracy can vary due to moisture, content of materials, wall texture, paint, etc. Not recommended for use on lath and plaster. Indoor use only.

©2014 DeepScan, SpotLite, StudSensor, WireWarning, and Zircon are trademarks or registered trademarks of Zircon Corporation • C/N 2246 Rev A 05/14

Zircon Corporation | 1580 Dell Avenue | Campbell, CA 95008 | info@zircon.com | www.zircon.com | 408-963-4550 | 800-245-9265