


# E 9070

SP270

SOIL DISPLACEMENT KIT

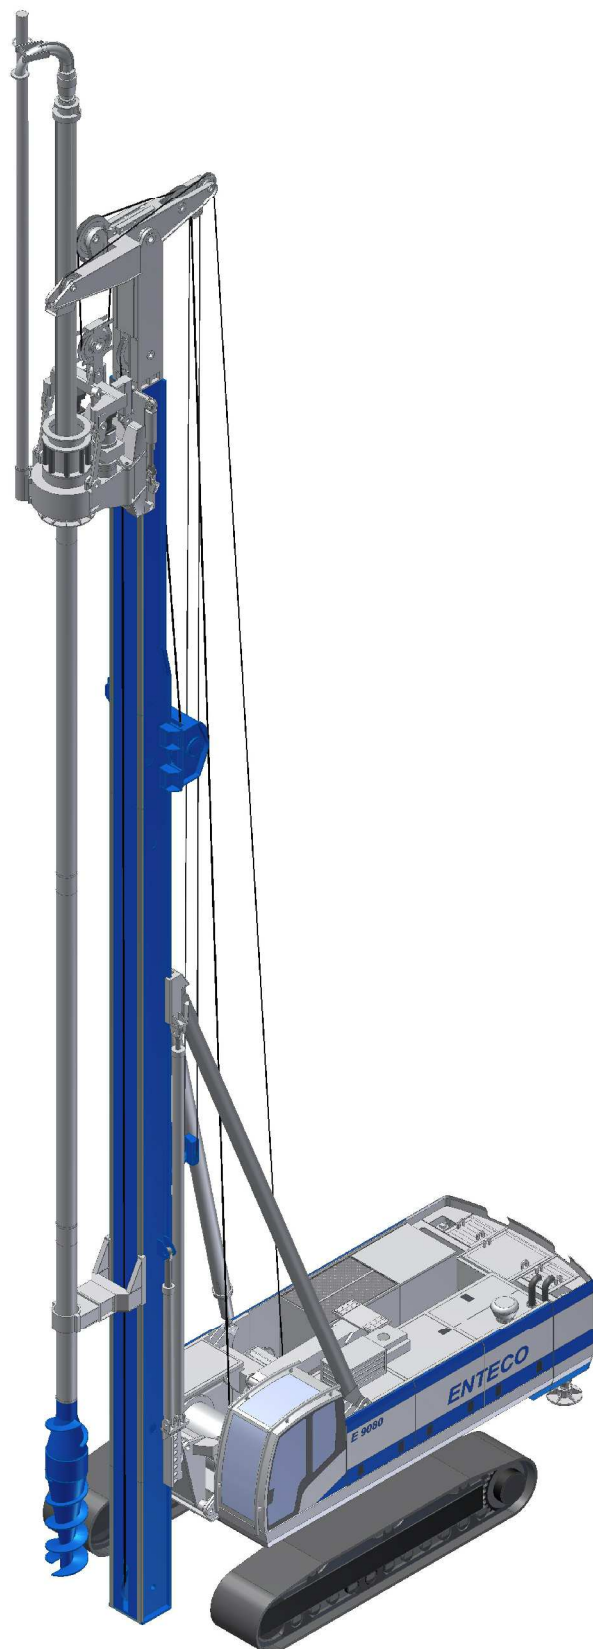


# E 9070

SP270

SOIL DISPLACEMENT KIT



**ENTECO**  
EXPERIENCE AND INNOVATION

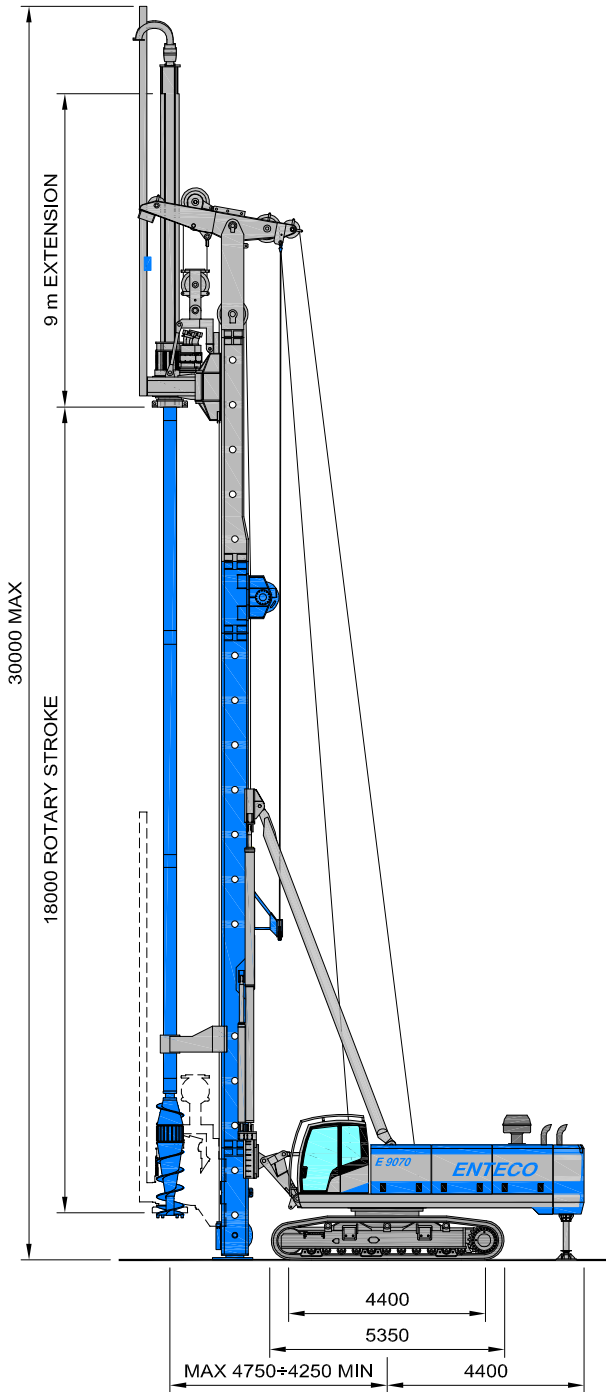


## E 9070 - SP270 SOIL DISPLACEMENT KIT

<b>OPERATING WEIGHT</b>	ton	up to 78
Drilling diameter	mm	320+600
Max drilling depth	m	32
<b>MAST</b>		
Mast vertical travel	mm	1700
<b>CROWD SYSTEM</b>		
Rotary stroke	mm	18000
Crowd force	kN	280
Extraction force	kN	760
<b>ROTARY</b>		
Model		ENTECO RH51/2
Max torque	kNm	275
Max drilling speed	rpm	28
Kelly extension	m	6, 9, 12, 15

## E 9070 - BASE MACHINE

<b>CRAWLERS</b>			
Overall width	mm	3000+4500	
Track pads	mm	900	
Crawler drive speed	km/h	1.8	
<b>DIESEL ENGINE</b>			
Model	CATERPILLAR	C9 ACERT	C13 ACERT
Max power	HP/KW	350/261	440/328
Fuel tank capacity	litres	650	
<b>MAIN WINCH</b>			
Max line-pull 1st layer	kN	240	
Free-fall device		option	
<b>AUXILIARY WINCH</b>			
Max line-pull 1st layer	kN	100	
Free-fall device		option	

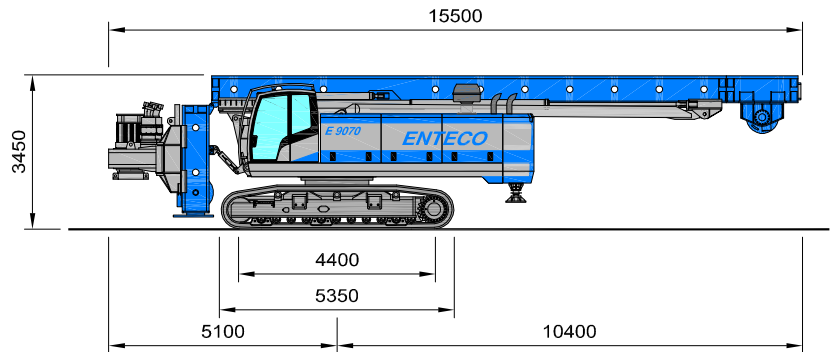

Via dell'Artigianato, 33 - Z.I. - 30020 Fossalta di Piave - VENEZIA - ITALIA  
Tel +39 0421 67.99.77 - Fax +39 0421 67.99.93 - e-mail: info@entecodrill.com - www.entecodrill.com