


# E 9100

SP400

SOIL DISPLACEMENT KIT



**ENTECO**


EXPERIENCE AND INNOVATION



# E 9100

SP400

SOIL DISPLACEMENT KIT

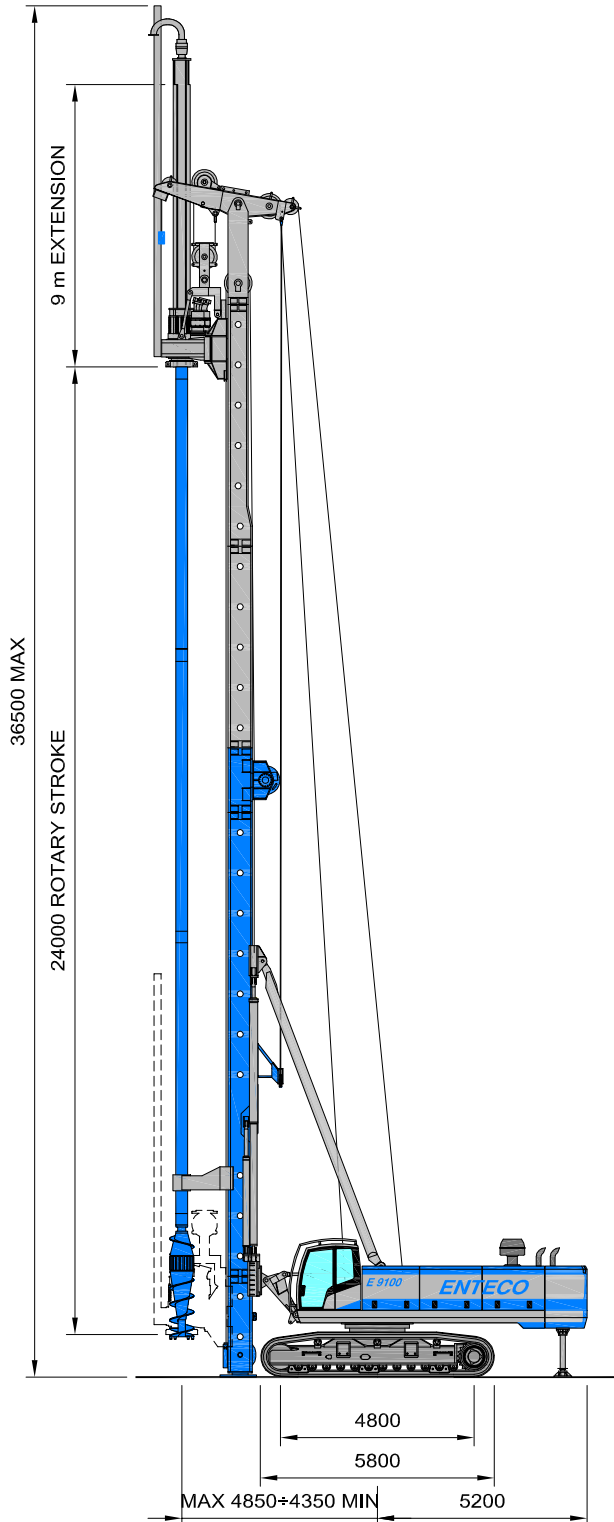

## E 9100 - SP400 SOIL DISPLACEMENT KIT

<b>OPERATING WEIGHT</b>	ton	up to 115
Drilling diameter	mm	320÷800
Max drilling depth	m	38
<b>MAST</b>		
Mast vertical travel	mm	2000
<b>CROWD SYSTEM</b>		
Rotary stroke	mm	24000
Crowd force	kN	400
Extraction force	kN	1000
<b>ROTARY</b>		
Model		ENTECO RH61/3
Max torque	kNm	400
Max drilling speed	rpm	33
Kelly extension	m	6, 9, 12, 15

## E 9100 - BASE MACHINE

<b>CRAWLERS</b>			
Overall width	mm	3000÷4500	
Track pads	mm	900	
Crawler drive speed	km/h	1.8	
<b>DIESEL ENGINE</b>			
Model	CATERPILLAR	C15 ACERT	C18 ACERT
Max power	HP/kW	540/403	700/522
Fuel tank capacity	litres	800	
<b>MAIN WINCH</b>			
Max line-pull 1st layer	kN	330	
Free-fall device		option	
<b>AUXILIARY WINCH</b>			
Max line-pull 1st layer	kN	150	
Free-fall device		option	

