


## **SFP-155Mbit/s**

### **BiDi**

Transceiver Module

SC Connector

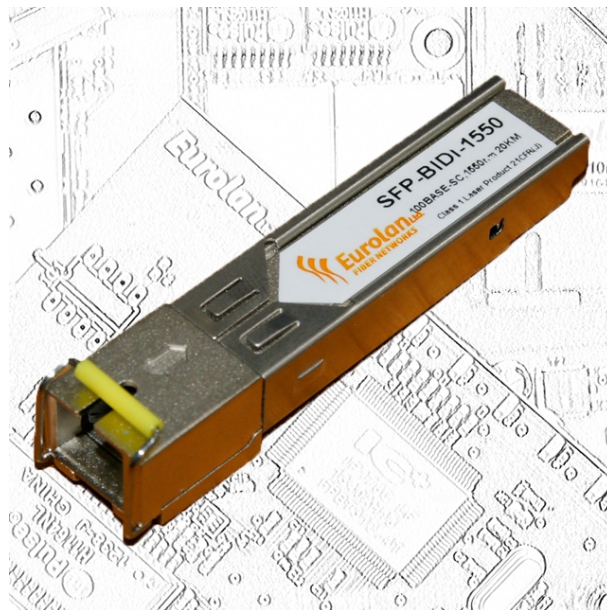

#### **1. Features**

- Compliant with Industry Standard RFT Electrical Connector and Cage
- 100Ω differential AC coupled CML Outputs
- SFP package with LC receptacle optical interface.
- Single + 3.3V Power Supply and TTL Logic Interface
- Compliant with 155Mb/s data link
  - 1550nmTx/1310nmRx or 1310nmTx/1550nmRx
  - Distance 20 km
- EEPROM with Serial ID Functionality
- Extended Operating Temperature Range(0~70 degrees)
- Low EMI
- Class 1 Laser Product Compliant with the Requirements of IEC 60825-1 and IEC 60825-2
- RoHS compatible available

#### **2. Application**

- 100Mbit Ethernet
- Fiber channel
- Switch to Switch interface