

Engine	KIPOR 186F1E
Net Power	5.7 kW @ 3,600 rpm /6.6 kW @ 3,600 rpm
Vibration Frequency Range	55 Hz
Centrifugal Force Range	24 kN
Working Width	750 mm
Operating Weight	820 kg

# 6009 ROLLER



TOUGH WORLD. TOUGH EQUIPMENT.

# 6009 SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier II
Make	KIPOR
Model	186F1E
Gross Power	5.7 kW @ 3,600 rpm 6.6 kW @ 3,600 rpm
Peak Torque	17 N · m
Number of Cylinders	1
Aspiration	natural
Cooling Type	air-cooled

ELECTRICAL SYSTEM	
System Voltage	12 V

DRIVE TRAIN	
Transmission Type	hydrostatic
Maximum Speed, fwd	3 km/h



AXLES	
Steering System	hydraulic
Steering Method	articulation

BRAKES	
Service Brake Type	hydraulic
Service Brake Actuation	hydraulic
Parking Brake Actuation	mechanical apply; hydraulic release

PERFORMANCE	
Static Linear Front Drum Load	55.6 kg - mm
Number of Vibrating Drums	2
Nominal Amplitude Range	0.35 mm
Vibration Frequency Range	55 Hz
Centrifugal Force Range	24 kN
Number of Amplitude Settings	2

OPERATING WEIGHTS	
Operating Weight with Ballast	820 kg
Weight on Front Drum	400 kg
Weight on Tires	420 kg

SERVICE CAPACITIES	
Fuel Tank	4.8 L
Engine Oil	1.3 L

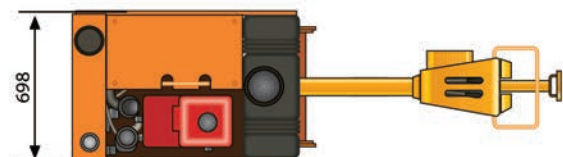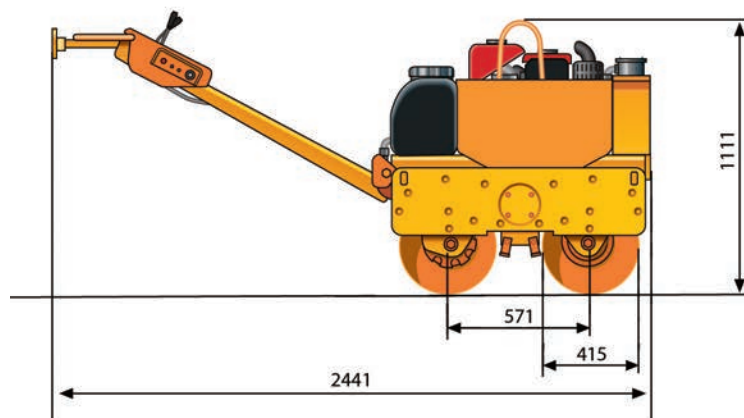

Unit: mm

## Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China  
 T: +86 772 3886124 E: overseas@liugong.com  
 www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment.

05/2014 Designed by LiuGong