
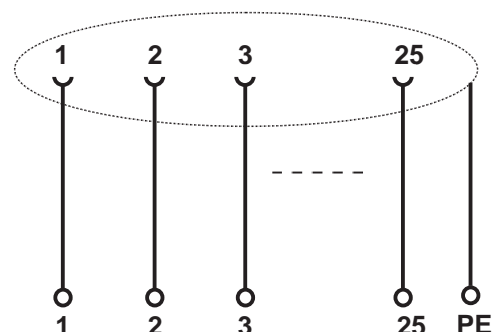


# Transfer module for SUB-D- socket contact 25-pin

to snap onto DIN - rail EN 50022  
and EN 50035

Passive hand over element from  
pin strip to screw terminal

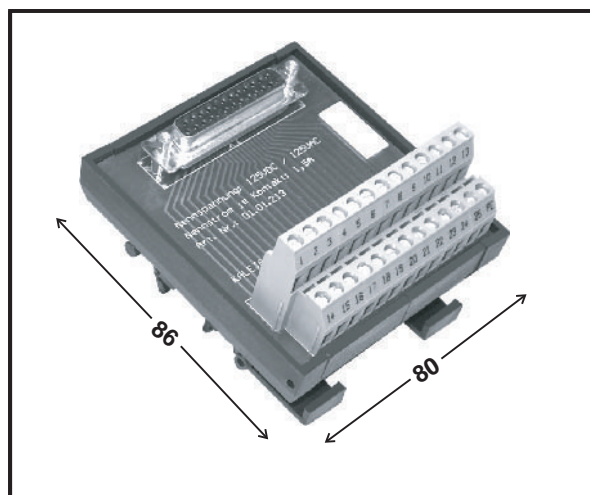

<b>Short designation / type</b>	<b>USV - S - 25 - B</b>
<b>Art. - No.</b>	<b>01.01.213</b>
<b>Technical data: pin strip</b>	
Implementation	socket contact 25-pin
Rated voltage	125VAC / 125VDC
Current-carrying capacity each contact	2,5A by 70°
Contact pin material	Ni / Au
Interlock clamp	4 - 40 UNC
<b>Technical data: screw terminal</b>	
Mode of terminal	Double row terminals
Clamping part	Brass, nickel plated
Creep resistance	KB 500
Insulation body	PA6GV/PBTP
Approvals	UL,SA (clamp)
<b>Other data</b>	
Ambient temperature range	-20°C to + 70°C
Status indicator	no
Case: plastic	can be snapped
Position of installation / mounting	addable
Mode of connection: screw terminal	single wire 4mm <sup>2</sup> , fine wire 2,5mm <sup>2</sup>
clearance and creeping distance	according to DIN VDE 0110
Dimensions: W x D x H	80mm x 86mm x 65mm