

EVA50SS EVC50SS

zone 1	zone 2	Ex db IIC Gb II2GD		-20°C		
zone 21	zone 22	Ex tb IIIC Db II2GD		+40°C		
ILLUMINATORI DI LIVELLO	T6	T5	T4	T3	IP66	-20°C
LEVEL GAUGE	T 85°C	T 100°C	T 135°C	T 200°C		+60°C

Caratteristiche: ILLUMINATORI DI LIVELLO serie EVA50/EVC50 adatte per lampade ad incandescenza, lampade fluorescenti, lampade alogene e lampade led, certificata INERIS, bassi consumi e durata illimitata. Guarnizione O-RING in neoprene per protezione meccanica IP66.

Features: LEVEL GAUGE type EVA50/EVC50 suitable for incandescent lamp, fluorescent lamp, halogen lamp and led lamp, INERIS certificate, low consumption and high performance. Neoprene O-RING gasket for waterproof protection IP66.

Materiali: Corpo e coperchio in STAINLESS STEEL 316, viteria in stainless steel, globo trasparente in vetro termoresistente e resistente agli urti, gabbia in acciaio inox (se richiesta), riflettore (se richiesto).



Materials: STAINLESS STEEL 316 body and cover, stainless steel hardware, transparent globe resistant and impact resistant glass, stainless steel guard (on request), reflector (on request).

SERIE SERIES CODICE ORDINE CODE ORDER	INCANDESCENZA INCANDESCENT INC..	FLUORESCENTI FLUORESCENT FLU..	ALOGENE HALOGEN AL..	LED LED..
EVA50 EVC50	40 to 150W	5 to 18W	18 to 105W	5 to 29W

**Alimentazioni:
Voltage:
da 12V a 440V AC
da 12V a 125V DC**



EVA50SS EVC50SS

Stainless steel 316

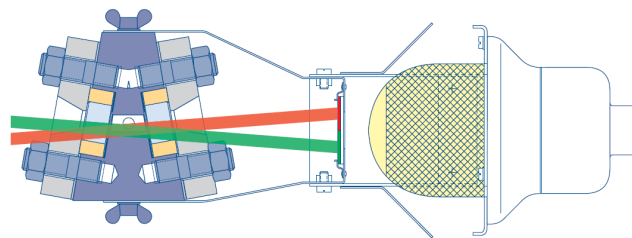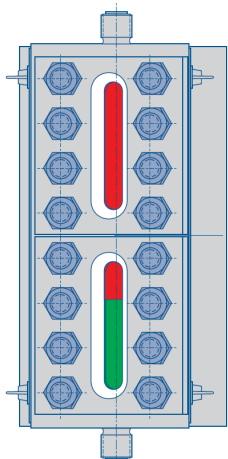


EVA50SS

EVC50SS

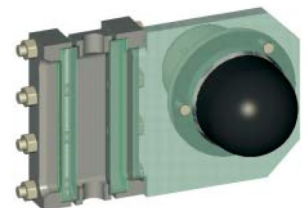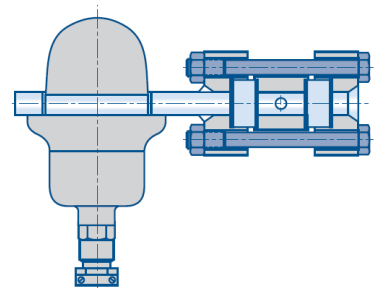


EVA...

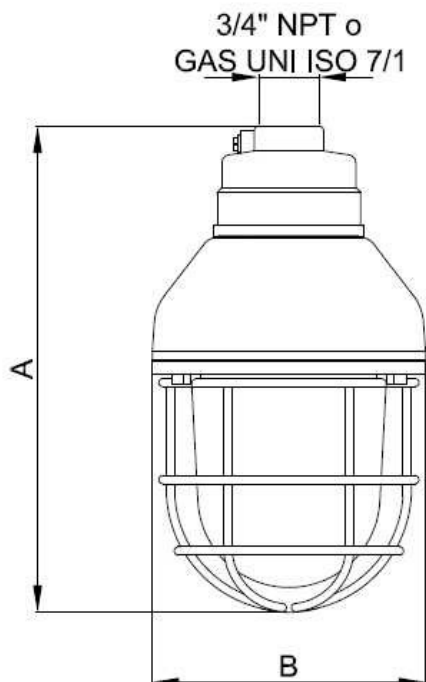


SERIE SERIES	DIMENSIONI mm DIMENSIONS mm	
	A	B
EVA100	325	170
EVA200	357	200
EVA300	433	220

EVC...

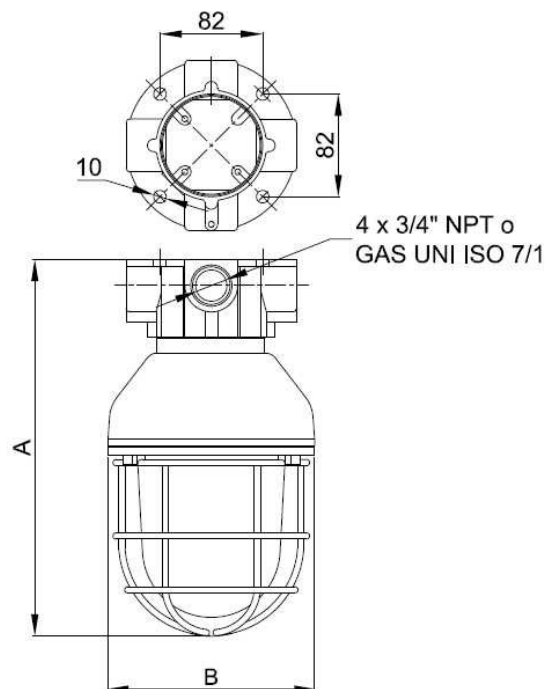

SERIE SERIES	DIMENSIONI mm DIMENSIONS mm	
	A	B
EVC100	325	170
EVC200	357	200
EVC300	433	220


EVA50

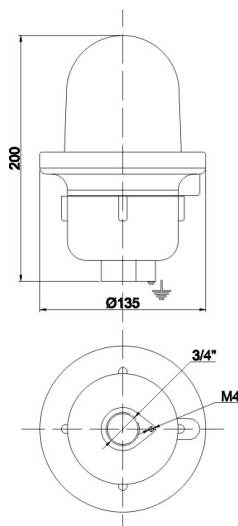

SERIE SERIES	DIMENSIONI mm DIMENSIONS mm	
EVA50	200	135

SERIE SERIES	DIMENSIONI mm DIMENSIONS mm	
EVC50	215	135

EVC50

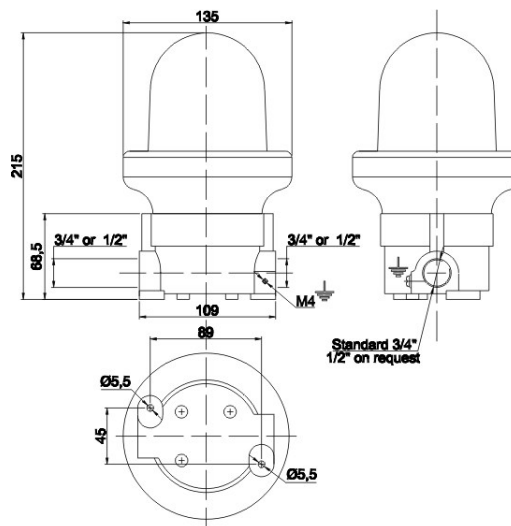

**ESEMPIO ORDINE
EXAMPLE ORDER**

CODICE CODE	LAMPADE FORNITA LAMP PROVIDED
EVA50-FLU-18 EVA50-FLU-18	EVA50 FLUORESCENTE 18W EVA50 FLUORESCENT 18W
EVC200-INC-200 EVC200-INC-200	EVC200 INCANDESCENZA 200W EVC200 INCANDESCENT 200W